



WEIGH SCALE BLENDER & INTEGRATED LOSS IN WEIGHT CONTROL

INTEGRATED SOLUTION

The WXB Extrusion Blender combines Maguire's proven Gravimetric Blending Technology with comprehensive Loss in Weight Control.

BLEND CONTROL

The gravimetric blender is fitted with stainless steel slide gates that are controlled by the Maguire software to constantly update dispenses in a batch. I.e. Dispense accuracy of +/- 1/10 of 1% of setpoint.

BLENDING & THROUGHPUT CONTROL

The batch of materials is then dispensed into a mix chamber where the materials are blended together. The mix chamber and the materials usage by an extruder are monitored by load cells every second, and the data is being updated to the integrated control.

RAW MATERIAL SAVING UP TO 10%

By automating the control and knowing the material usage the system can achieve savings in raw materials usage of up to 10%. Through quicker job changes and meeting job specifications faster.

RETURN ON INVESTMENT WITHIN 8-12 MONTHS

Fast payback by reduced material usage and production scrap. Alongside savings are derived from constant throughput control and adjustment of extrusion process targets.

EXTRUSION APPLICATIONS

Suited to all continuous extrusion processes for mono and co-extrusion processes. Applications include Film, Cable, Sheet, Pipe & Profile extrusion.

SCRAP REDUCTION


Maximize production with faster start-ups and constant regulation of production parameters.

QUICK MATERIAL CHANGES & CLEAN OUT

Easy access to all material contact surfaces of the machine including hoppers, weigh bin and mixing chamber allows for rapid material changes without the use of tools. A compressed air gun is provided for quick cleanout.

EXPANDABLE & MODULAR

The WXB control is expandable and can be simply integrated with further downstream controls for automatic gauging and process controls. To provide complete line control that is seamless.















WXB 240 WEIGH EXTRUSION BLENDER DIMENSIONS

WXB-240 FRONT VIEW

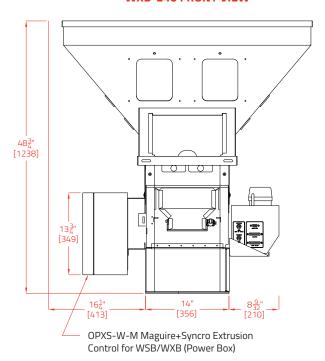


WXB-240 SIDE VIEW

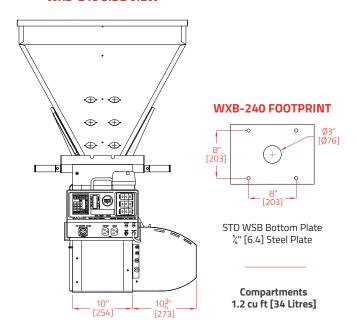

TECHNICAL DATA

Model WXB 240				
Maximum Throughput*	340kg/h to 450kg/h 750lb/h to 1,000lb/h			
Number of Materials	4			
Material Dispense Systems	4-2"x3" Slide Gate			
Weight	127kg 280lb			
Power Supply	120vac - 4.8 Amp 230vac - 2.7 Amp			
Operating Air Pressure	4-6 Bar 60-90psi			
Air Consumption	0.3 m³/hr 0.17cfm			
Shipping Weight	139Kg 306lb			
H x W x D	132x 112 x 82cm 52 x 44 x 32.3in			

WXB-240 LID TOP VIEW



^{*}Throughput achieved is influenced by number of materials, how well they flow, vibration and loading consistency each can effect maximum output of a blender, which in turn effects sizing the correct blender required for an application. Maguire reserves the right to cancel product or change product, product specifications and data without notice to improve reliability, function, design or otherwise.



MAGUIRE WORLDWIDE DISTRIBUTION LOCATIONS						
Maguire USA	Maguire Canada	Maguire Europe	Maguire IMEA	Maguire Asia	Maguire China	
Aston, PA, USA	Ontario, Canada	Staffordshire, UK	Dubai, UAE	Singapore	Shanghai	
T: +1 610 459 4300	T: +1 905 879 1100	T: +44 1827 338 280	T: +971 4 881 6700	T: +65 6848 7117	T: +86 21 5882 3410	
F: +1 610 459 2700	F: +1 905 879 1101	F: +44 1827 338 285	E: info@maguire-imea.com	F: +65 6542 8577	F: +86 21 5882 3420	
E: info@maguire.com	E: info@maguirecanada.com	E: info@maguire-europe.com		E: magasia@maguire-products.com.sg	E: amber@maguirechina.com	